


玻璃钝化桥式整流器  
GLASS PASSIVATED BRIDGE RECTIFIERS

**DF005S THRU DF10S  
(DB101S THRU DB107S)**

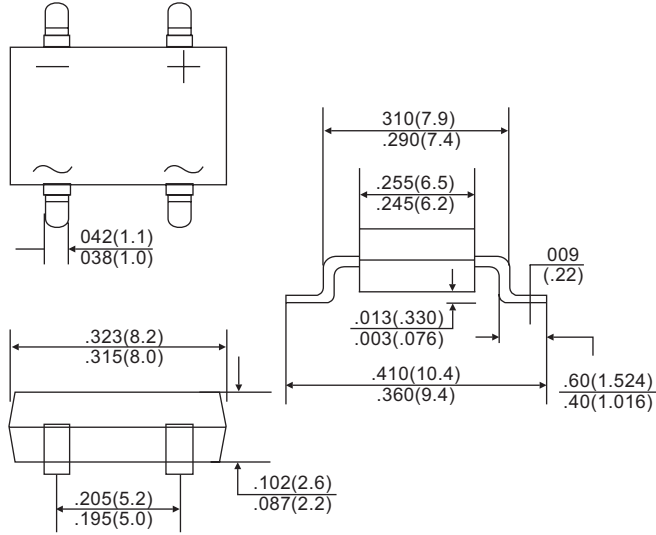

Unit: inch(mm)

**特征 FEATURES**

- \* Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- \* High surge current capability
- \* UL file number:E252843
- \* High temperature soldering guaranteed: 250°C/10 seconds at 5 lbs.(2.3kg)tension

**机械数据 MECHANICAL DATA**

CASE:Molded plastic body over passivated junctions  
Terminals:plated leads solderable per MIL - STD-750, Method 2026

Polarity:Polarity symbols marked on body

Mounting Position:Any

Weight:0.012 ounce,0.34grams

**极限值和电参数** TA=25°C 除非另有规定

Maximum Ratings&Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified

	SYMBOLS	DF 005S	DF 01S	DF 02S	DF 04S	DF 06S	DF 08S	DF 10S	UNITS
		DB 101S	DB 102S	DB 103S	DB 104S	DB 105S	DB 106S	DB 107S	
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	Volts
最大均方根电压 Maximum RMS voltage	VRMS	35	70	140	280	420	560	700	Volts
最大直流阻断电压 Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	Volts
最大正向平均整流电流 Maximum average forward output rectified current	I(AV)	1.0							Amp
正向峰值浪涌电流 8.3ms 单一正弦半波 Peak forward surge current 8.3ms single half sine-wave	IFSM	50.0							Amps
最大正向电压降 Maximum forward voltage @IF=1.0A	VF	1.1							Volts
最大反向漏电流 Maximum reverse voltage	IR	5.0 500							μA
典型结电容 Type junction capacitance VR=4.0V f=1.0MHz	CJ	150.0							pF
工作温度和存储温度 Operating junction and storage temperature range	TJ.TSTG	-55 to + 150							°C

**RATING AND CHARACTERISTIC CURVES (TA=25°C UNLESS OTHERWISE NOTED)  
DF005S THRU DF10S(DB101S THRU DB107S)**

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

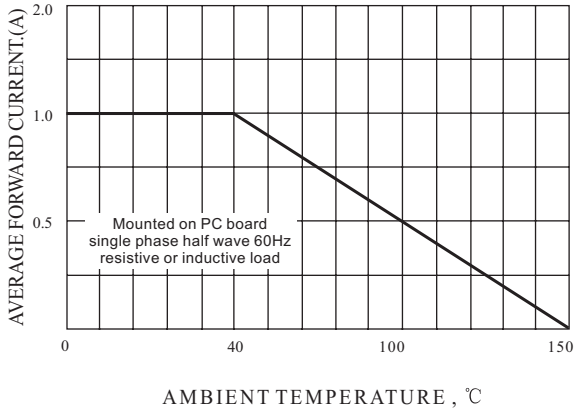


FIG.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

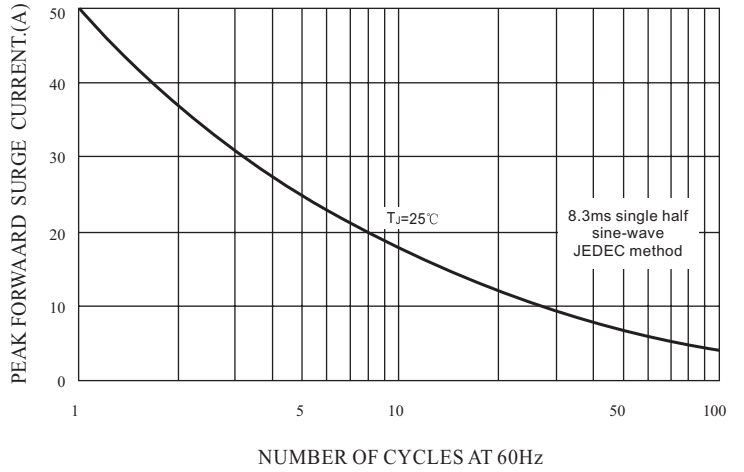


FIG.3-TYPICAL FORWARD CHARACTERISTICS

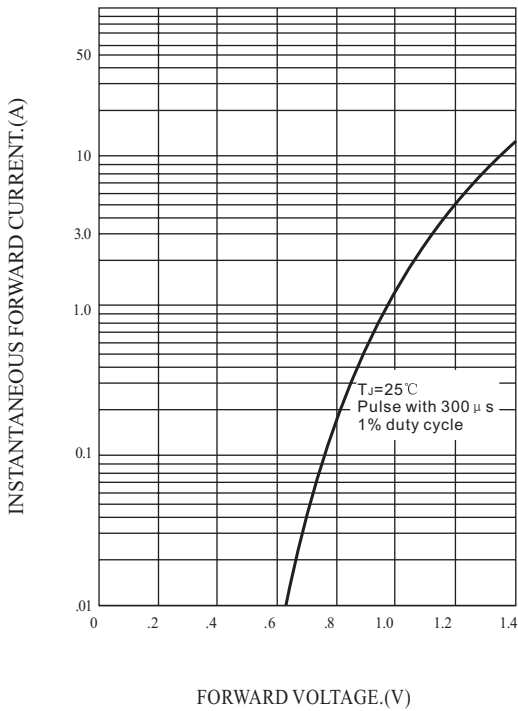


FIG.4-TYPICAL REVERSE CHARACTERISTICS

